

The background of the entire page is a close-up photograph of a brown, textured wall membrane. The surface is covered with numerous water droplets of various sizes, some of which are larger and more prominent, reflecting light. The texture of the membrane appears slightly grainy and uneven. The overall color palette is a range of browns, from light tan to dark chocolate and near-black tones in the shadows.

MAJESTIC WETROOMS


MAJESTIC WALL MEMBRANE

PRODUCT
GUIDE

MAJESTIC WALL MEMBRANE

MAJESTIC WALL MEMBRANE

PRODUCT DETAIL

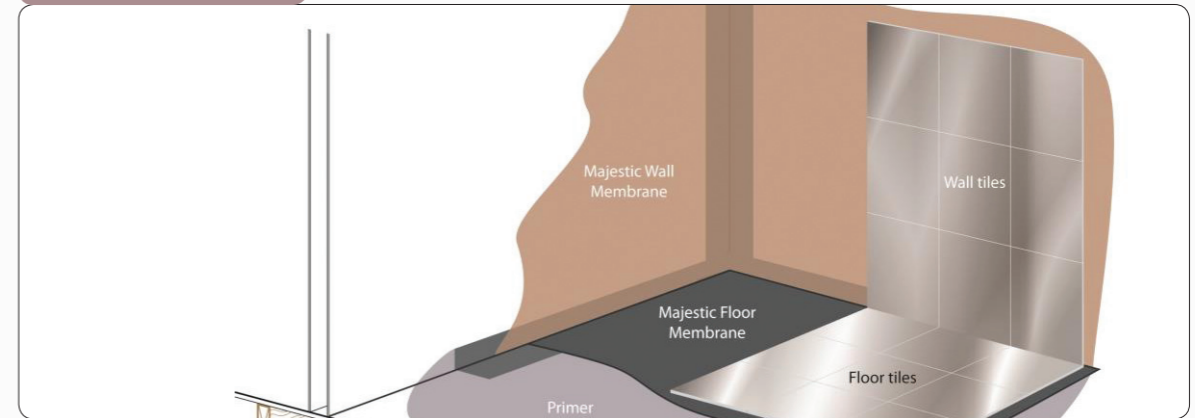


Majestic Wall Membrane is a flexible coating for waterproofing wall surfaces prior to the application of ceramic tiles and natural stone in wetroom and other critical areas.

KEY FEATURES

- 10 year guarantee
- Solvent-free
- Quick and easy to apply
- Compatible with Majestic Floor Membrane
- Suitable for use on all commonly encountered substrates



PRODUCT DETAILS

IMAGE	DESCRIPTION
	Majestic Wall Membrane 8kg Tub

MAJESTIC WALL MEMBRANE

IN DETAIL

Majestic Wall Membrane is a ready-to-use, pale blue, solvent-free, soft paste which bonds perfectly to adhesives used for fixing ceramic tiles and natural stone.

It may be used on all commonly encountered wall substrates including plasterboard, gypsum or cementitious render, lightweight cement block and marine plywood.

Majestic Wall Membrane should be applied using a brush or short pile roller to give a continuous thin layer of product at least 1mm thick.

Junctions between wall and floor and all corners should be reinforced with Reinforcing Tape.

Allow 24 hours before tiling. Should a second coat be necessary, allow to dry for 2 hours between coats.

Pack Size: 8kg

Colour: Pale blue

Coverage: 1kg per m² /coat
8m² per 8kg pack – based on 1 coat

FWM PERFORMANCE & COMPOSITION

Paste density	1kg per m ²
Application temperature	Between 5°C and 30°C
Service conditions	-20°C to +50°C
Coat drying time	2 hours touch dry
Before tiling	24 hours*
Contact with water	7 days

*Note: All times refer to site conditions of 20°C. These times will be increased at lower temperatures and reduced at elevated temperatures. These performance figures are typical values and should not be considered a product specification.

TIMBER FLOORS (SMALL EN-SUITE)

Majestic Floor Membrane to be applied, in accordance with the manufacturer's recommendations, to the entire floor area. Additional Reinforcing Tape to be applied to all wall to wall junctions, soap recesses etc, within the shower area.

Majestic Wall Membrane to be applied, in accordance with the manufacturer's recommendations, to the walls within the shower area finishing a minimum of 2 metres high and overlapping onto the floor Membrane.

All pipe penetrations to be sealed with Jointing Compound.

For steam rooms, Majestic Wall Membrane should be applied full height to all walls.

LARGE TIMBER FLOORS AND SOLID FLOORS

Majestic Floor Membrane to be applied, in accordance with the manufacturer's recommendations, to the floor area finishing a minimum of 1 metre outside the shower area in all directions. Additional Reinforcing Tape to be applied to all wall to wall junctions, soap recesses etc, within the shower area.


Majestic Wall Membrane to be applied, in accordance with the manufacturer's recommendations, to the walls within the shower area finishing a minimum of 2 metres high and overlapping onto the floor Membrane.


All pipe penetrations to be sealed with Jointing Compound.

For steam rooms, Majestic Wall Membrane should be applied full height to all walls.

MAJESTIC WALL MEMBRANE

TYPICAL WATERPROOFING DETAIL

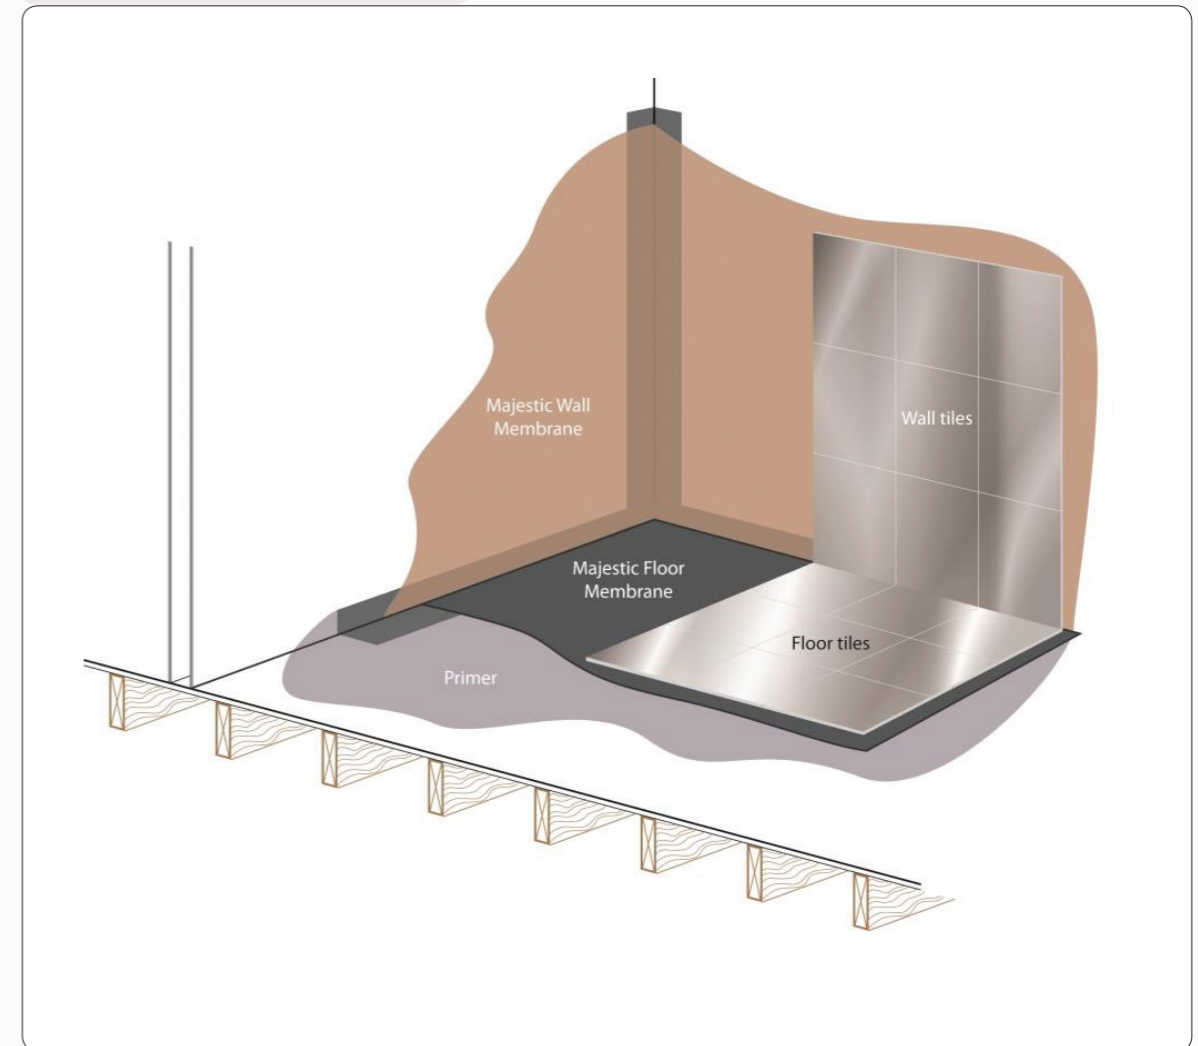

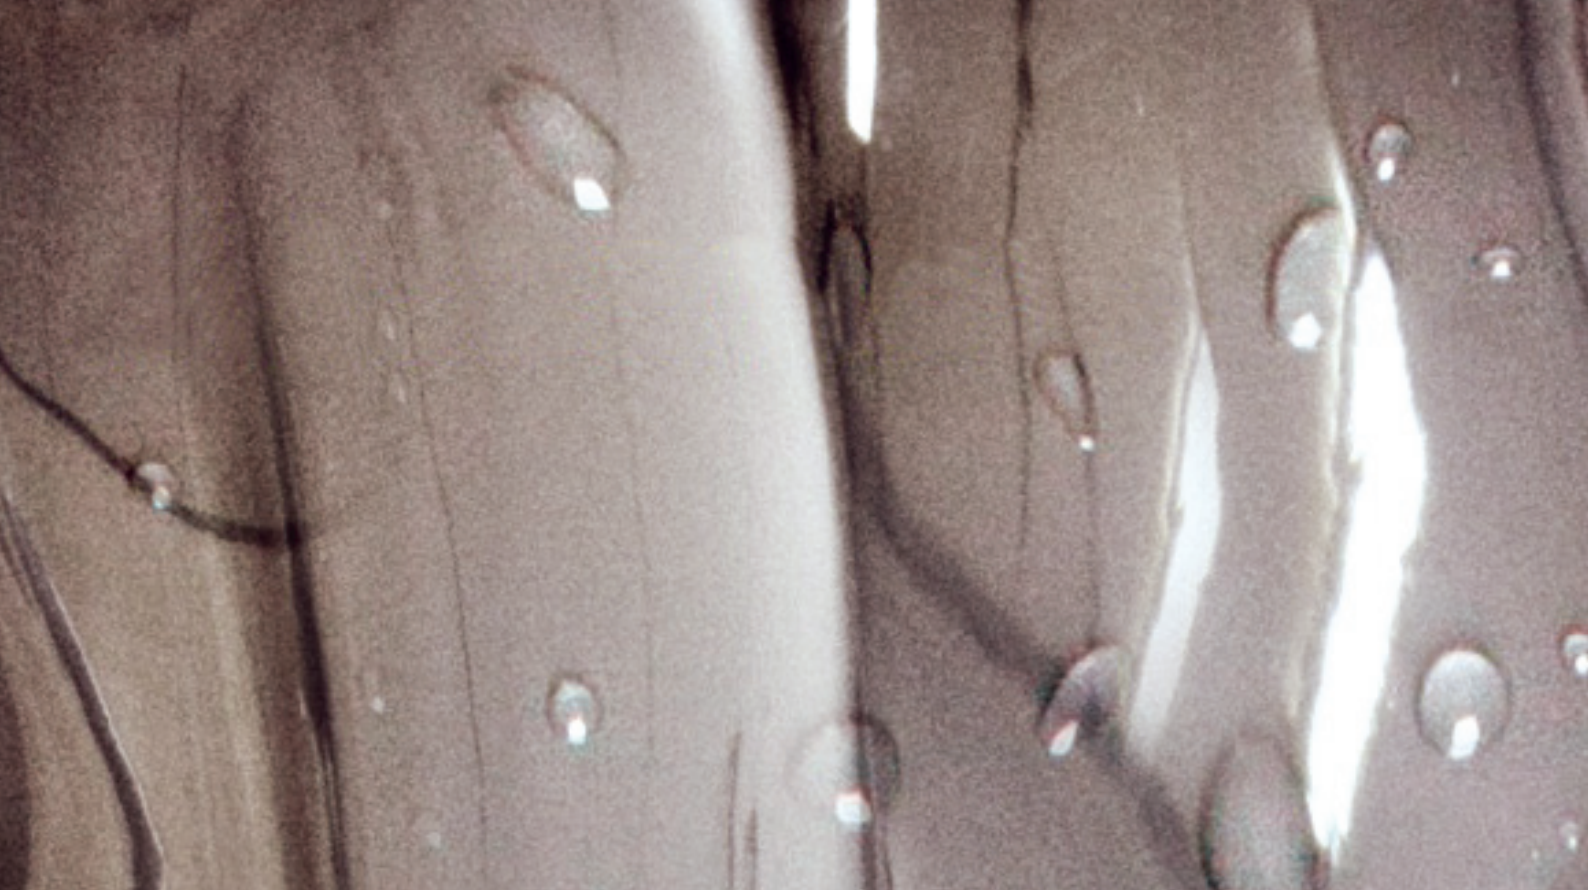

Majestic Shower Company Ltd

Harlow Office

Two North Place
Edinburgh Way
Harlow, Essex
CM20 2SL

Telephone: +44 (0)844 800 1500

Facsimile: +44 (0)1279 635074

Barnsley Office

Unit C, Shortwood Court
Shortwood Business Park
Barnsley, South Yorkshire
S74 9NW

Telephone: +44 (0)1226 360300

Facsimile: +44 (0)1226 749900

info@majesticshowers.com

www.majesticshowers.com

