


**MAJESTIC
INSTALLATION GUIDE**

**NAPOLI ALCOVE
FOR UNITS WITH RECESSED PROFILE
AND UNDERFRAME SUPPLIED
BEFORE GLASSWORK**



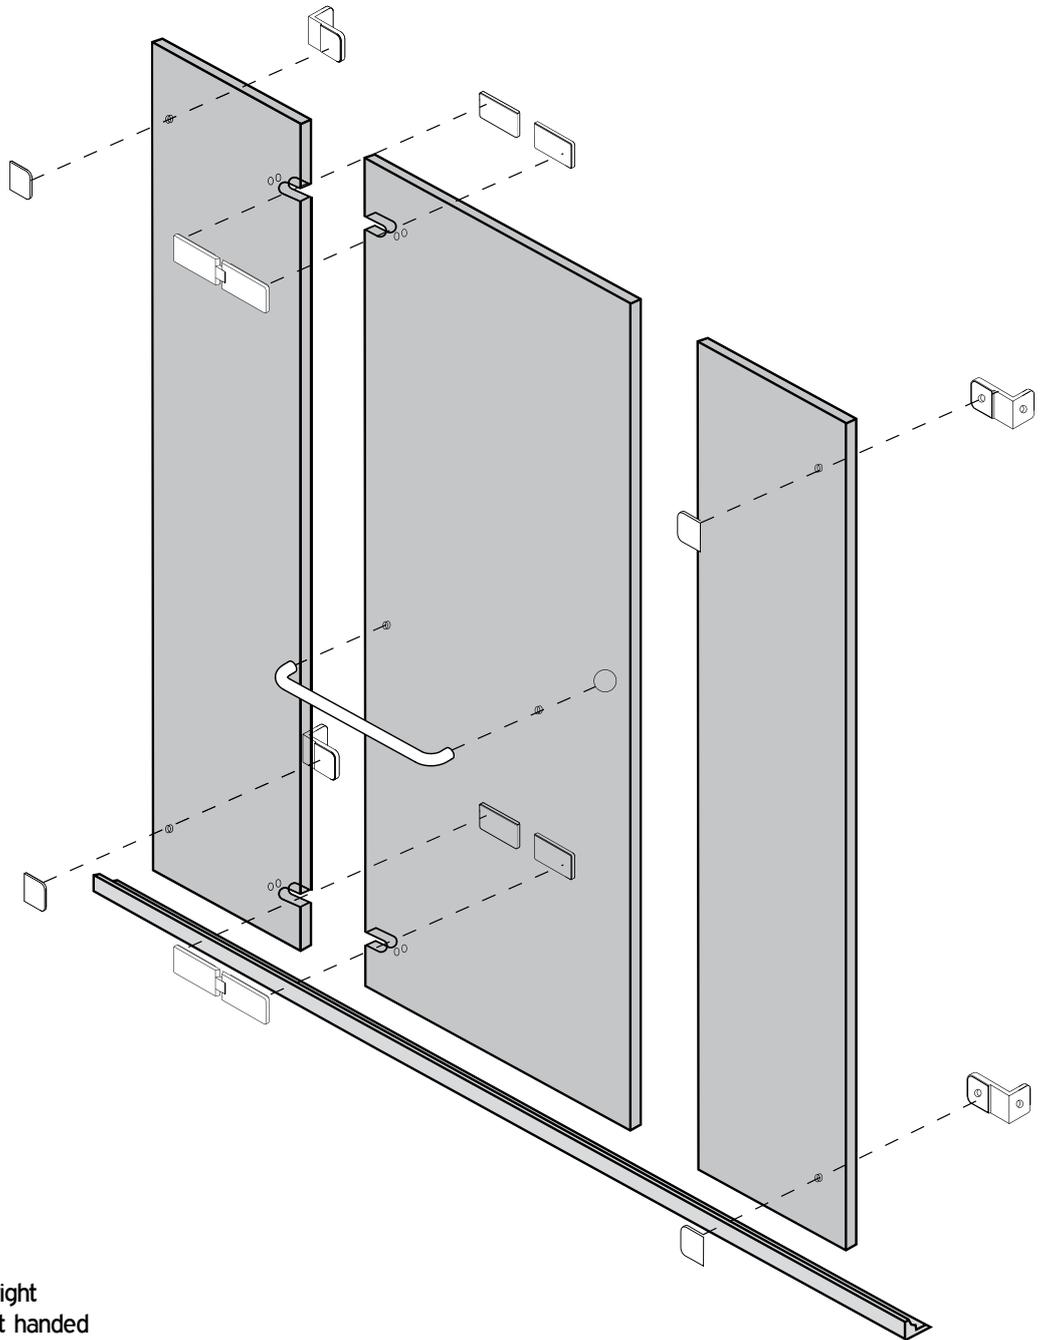

These Instructions are for a left and right handed unit. The diagrams show a left handed unit. You will have to determine which hand of unit you have before work commences.

Napoli Alcove

YOUR KIT SHOULD CONTAIN THE FOLLOWING:

KIT 1 (supplied before glass):

Recessed Wall Profile	x2	
Black rubber strip	x2	
10mm spacer	x1	
Underframe sections	x1	

KIT 2 (supplied after you provide dimensions):

Underframe door seal insert	x1	
Glass door panel	x1	
Glass in-line panel	x2	
Glass-to-glass hinge	x2	
Glass-to-wall bracket (inc. Rawl plugs, screws, screw covers)	x4	
4mm Allen key	x1	
Door mounting blocks	x2	
1936 door-to-glass seal	x2	
1916 Under-door seal	x1	
Door handle set	x1	

TOOLS REQUIRED:

2x suction glass lifters	Sealant gun
2m Spirit Level	High-quality silicone
Setsquare	Pencil
Power drill/driver	Metal Scriber
Hacksaw	Masking tape
Junior Hacksaw	Measuring tape
Fine tooth file	

IMPORTANT:

You have been supplied with wall profiles and underframe sections before the glass. Once the wall profiles and underframe have been installed, you can then provide accurate measurements which Majestic will use to manufacture your bespoke glass panels.

Please check the glass and all components thoroughly before installation; if any of the parts have been supplied incorrectly or are damaged, contact Majestic immediately. Any faults with the product found after installation cannot be rectified and Majestic will not be held responsible for re-installation of faulty or marked goods.

Unwrap all parts carefully to avoid damaging the chrome fittings!

This unit must be fitted on a level surface, unless the glass has been cut to suit any slope in the floor.

Whether fitting to a tiled floor or tray, ensure the area is degreased, dust free and level.

Do not place the glass panels on hard surfaces! Cover any hard surfaces you are working on with a cushioned material, to help prevent the glass from shattering on contact.

Before commencing the installation, please familiarise yourself with the glass-handling guide attached to the glass panels. Where appropriate, the top end of the glass panels will be indicated.


If you have purchased anti-calcium glass, the treated side of the glass will be indicated and should always face towards the inside (wet side) of the shower enclosure.

Certain sections of the installation of this shower enclosure require two people.

The plastic underframe door seal insert must not be cut down from its original size! It is factory cut to the width of the glass door plus 8 to 10mm; please check before commencing installation.

Before work commences make sure your tray to wall corner joint or floor to wall corner joint is fully silicone sealed.


Part 1 Before tiling or finishing your walls

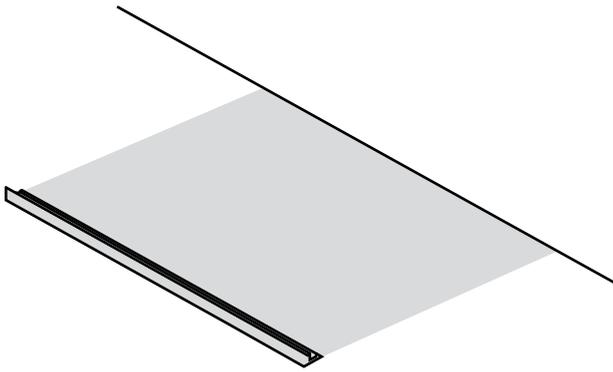

1


Place the underframe in position in the aperture where it is to be fitted between the two walls; cut to correct length.

The length may only be cut before ordering bespoke glass.

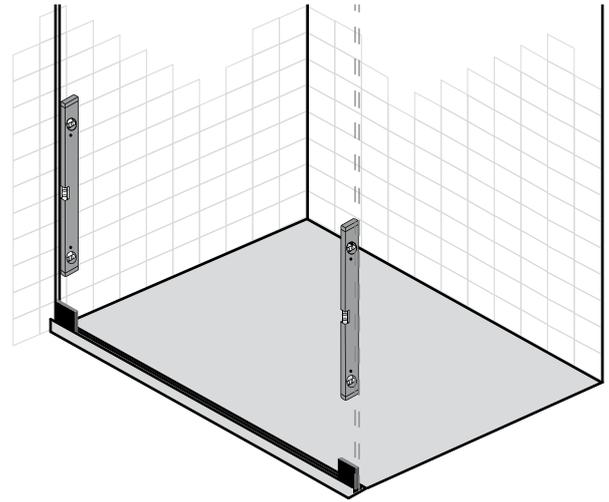

2

When you have established the correct position of the underframe, tape it in place and mark its position. Place the 10mm spacer in the underframe channel and use as a guide to mark the position of the vertical wall profiles with a 2m spirit level; it is critical that the wall profiles are installed plumb vertical.

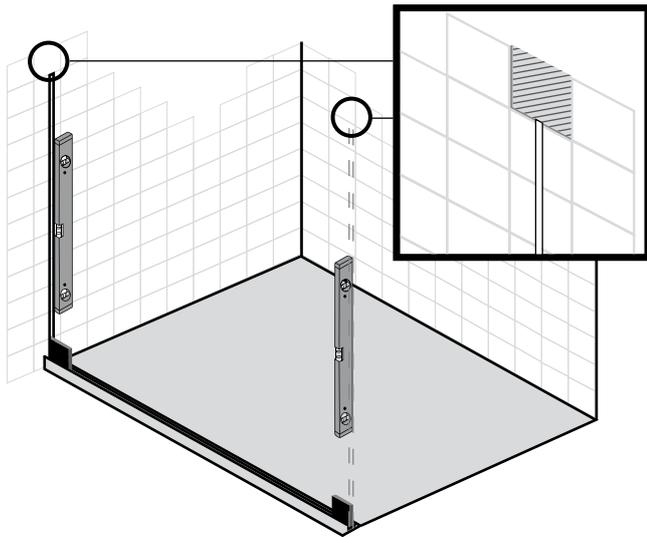


3


Un-tape and remove the underframe. When tiling the wall we recommend you leave off the tile above the open end of the recessed vertical wall profiles and fit it after the glass has been installed. Our standard unit height is 2000mm.

Part 2 After tiling or finishing your walls

4

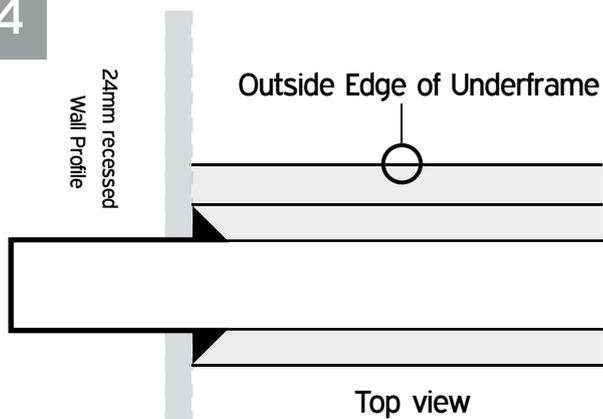


Wall Tiled Surface

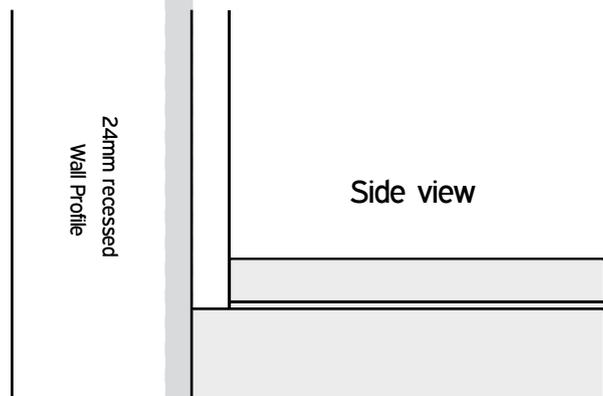

Underframe
(View from inside shower)


Install the recessed vertical wall profiles; be aware that the profiles may have been supplied over-length and that the standard unit height is 2000mm.

The vertical wall profiles have been cut at one end to fit neatly with the underframe. Once installed, the square ends of the underframe section must sit flush against the tiles or finished surface of the walls, as shown. The top end of the vertical wall profiles must be level with one another.

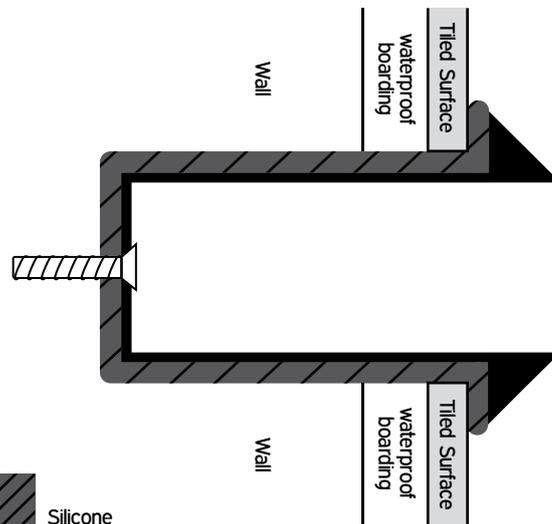

5

The recessed vertical wall profiles must be secured to the back wall with the screws provided, and the joint between the outer surface of the wall and the profile should be sealed securely with a high-quality silicone.

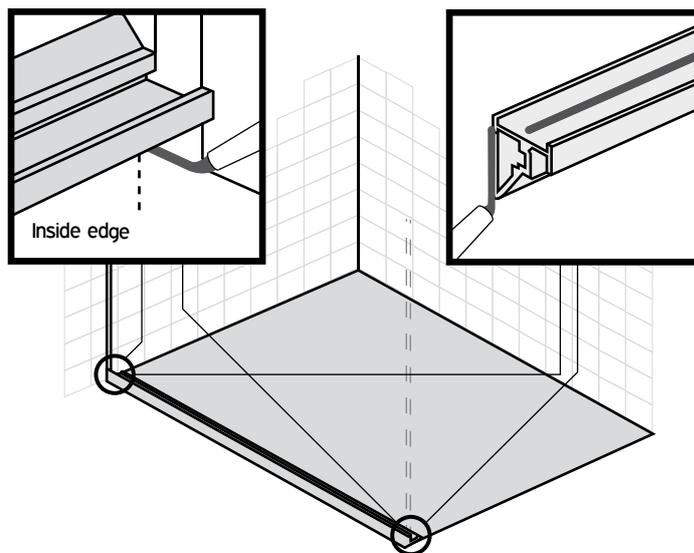

6

Run a substantial bead of silicone along the centre of the underside of the underframe, and apply a small amount of silicone into the corners where the underframe will sit against the walls.

Reposition the underframe where marked, ensuring it is aligned correctly to the recessed vertical wall profiles; tape into place.

Part 3 How to take measurements for the glass panels

Once you have fully measured for the glass panels
make note of these measurements below:


A:

B:

C:

D:



E:

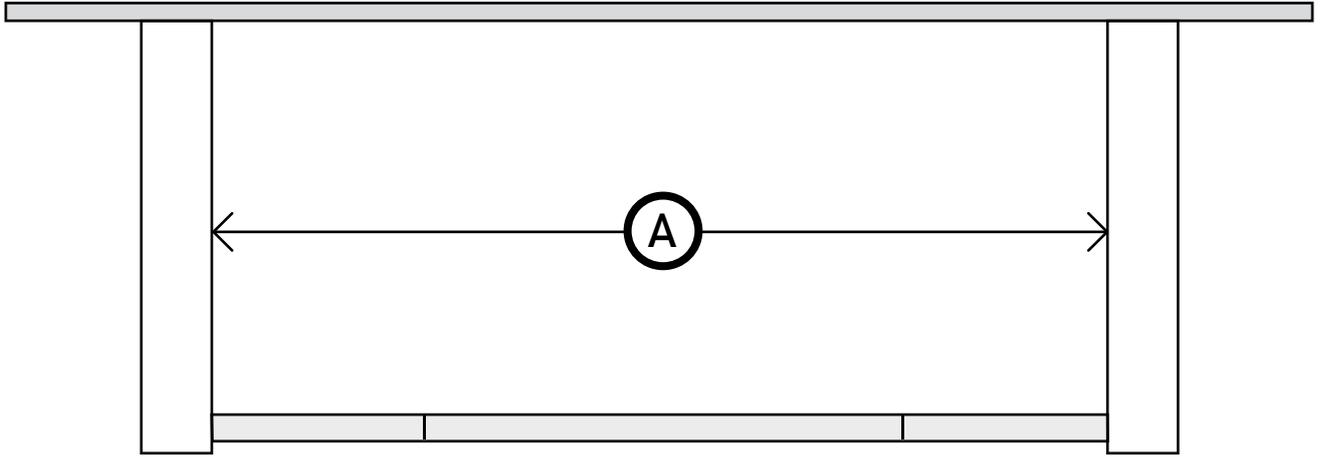

7

We require the following measurements (in mm at floor height):

A - from one tile or wall surface to the other

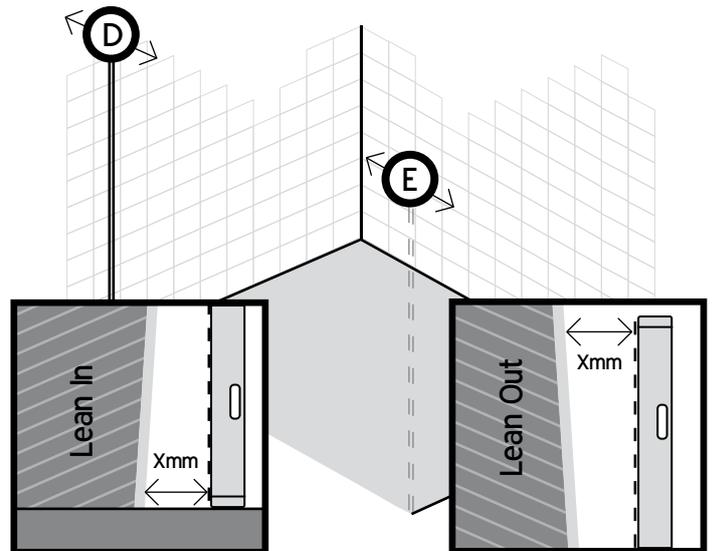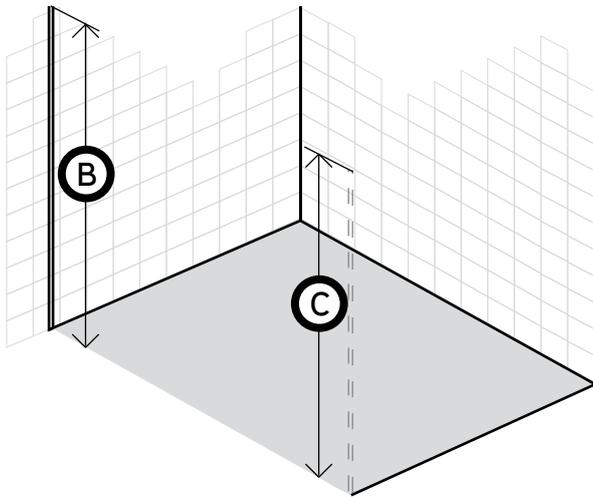

8

We also require the following measurements (in mm):


B and C - from the tray or floor to the top of the recessed vertical wall profiles. (Not the underframe)

These measurements should be the same.

D and E - check each profile individually to see if it leans in or out at the top by Xmm. You will need a two meter spirit level to do this.


Once you have taken the measurements, forward them to your supplier who will place an order with Majestic Showers.

Part 4 After receiving your bespoke glass panels

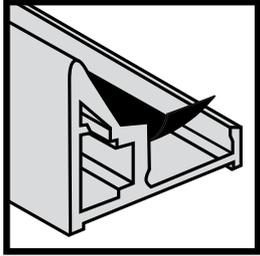

9


Insert a rubber strip into the underframe channel along its entire length.

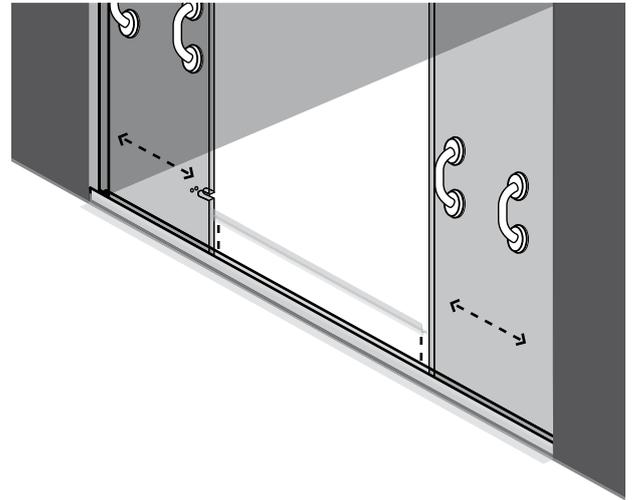

10

Using the suction glass lifters, lift the glass in-line panels into the recessed wall profiles and carefully lower into the underframe channel. Position the two glass in-line panels so that the underframe plastic seal fits snugly between them and the glass locates in the recessed profiles by an equal amount on each side.


! Ensure the glass panels are inserted into their recessed wall profiles from top to bottom, so that they do not fall out.

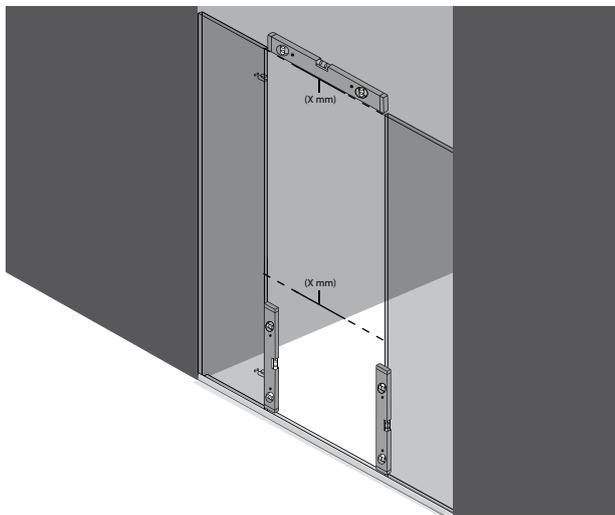

11


Check the two glass in-line panels are plumb vertical (so that the gap between them is uniform from top to bottom) and level with one another across the top edge; pack them up with 3" rubber strips if necessary, taking note of their positions. Do not use more than three strips of rubber under the glass.

Mark the positions of the end of the glass panels on the underframe using masking tape.

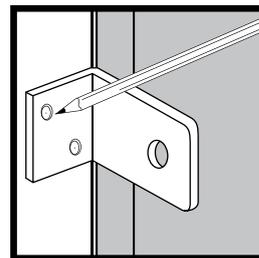


12

Disassemble the glass-to-wall brackets, being careful not to damage the faceplates. With the clear plastic gasket inserted and wall screw plates facing inwards, align the brackets centrally to the holes in the glass in-line panels; hold them in place and mark the screw holes.

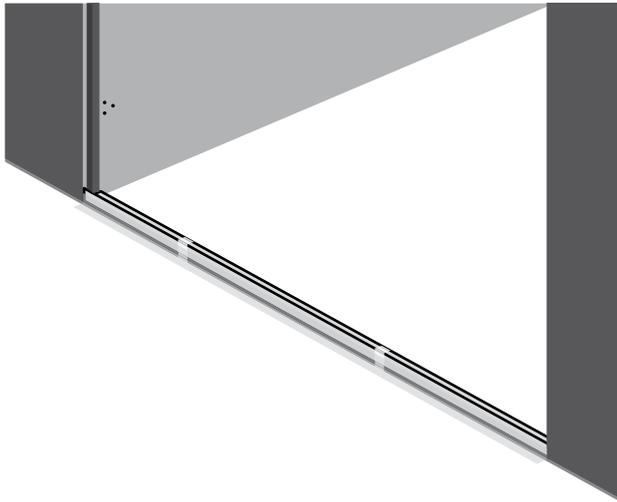


13

Put the brackets to one side and use the suction glass lifters to remove the glass in-line panels. Remove the black rubber strips taking note of how many there are under the panels. Drill 7mm wall holes for the brackets, as marked; insert Rawl plugs.

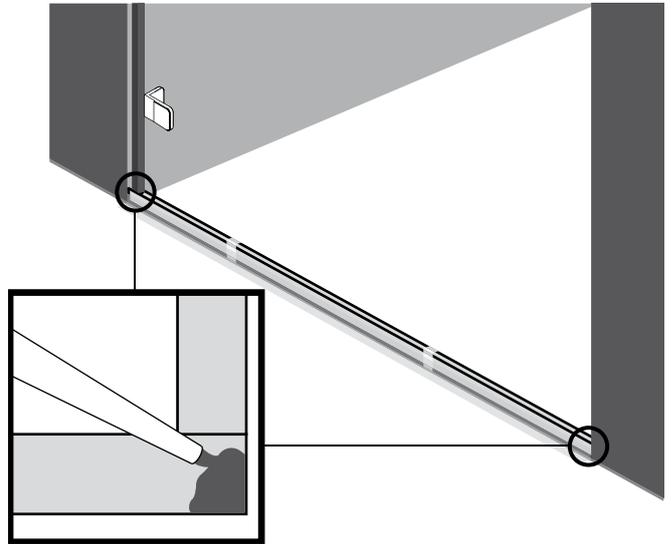

14


Loosely screw the glass-to-wall brackets to the wall. Apply a generous amount of silicone on the inside of the channels where they meet in the corner; this will squeeze into any gaps when the glass is inserted.

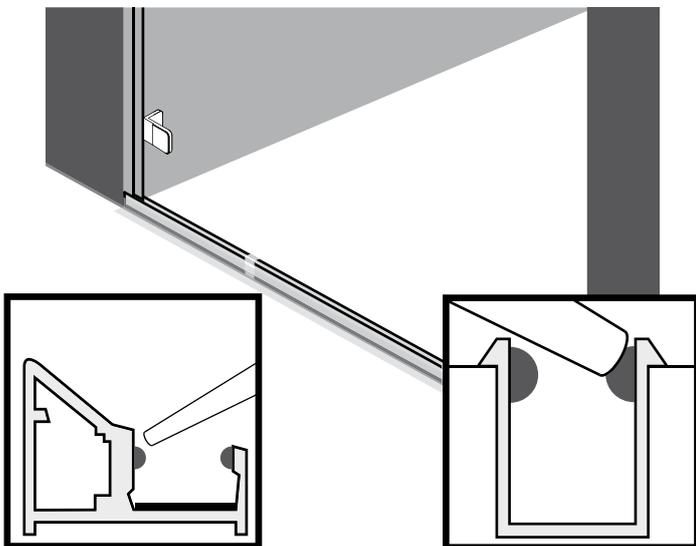

15


Replace the black rubber strips in their correct positions, trimming them to the same length as the glass in-line panels, leaving the door section empty.

Run beads of silicone along the inside of the recessed wall profiles and the underframe channel, as shown. Do not apply silicone to the section of underframe above which the door will hang where the seal clips into the underframe.

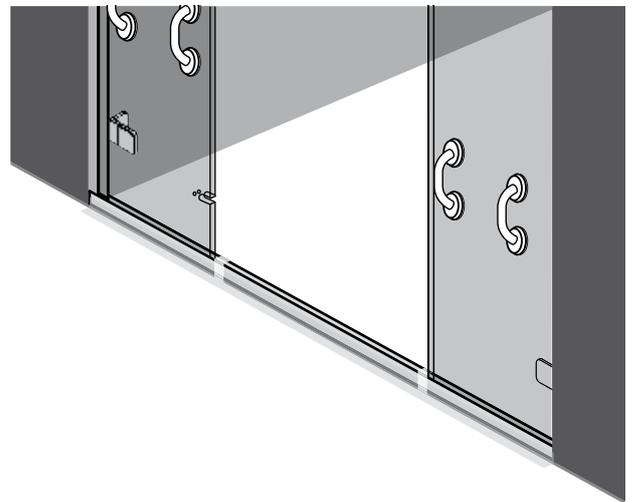

16


Using the suction glass lifters, replace the glass in-line panels into the silicone-lined profiles in their respective positions, as marked on the underframe, making sure the gap for the door is correct and the clear plastic underframe seal fits snugly between the in-line panels. This gap should be the width of the glass door +8mm to 10mm.

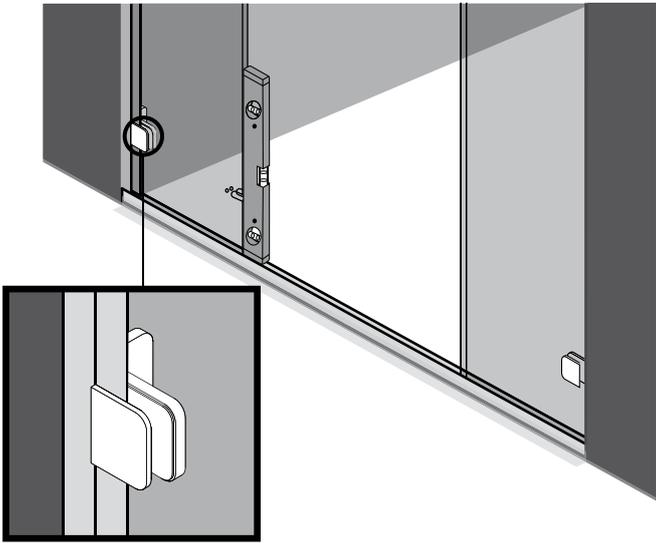

17



Loosely fix the faceplates to the glass-to-wall brackets through the holes in the glass, ensuring the clear plastic gaskets are inserted either side of the panel; fully tighten the wall screws.

Ensure the glass in-line panels are plumb vertical, then fully tighten all four glass-to-wall bracket faceplates.

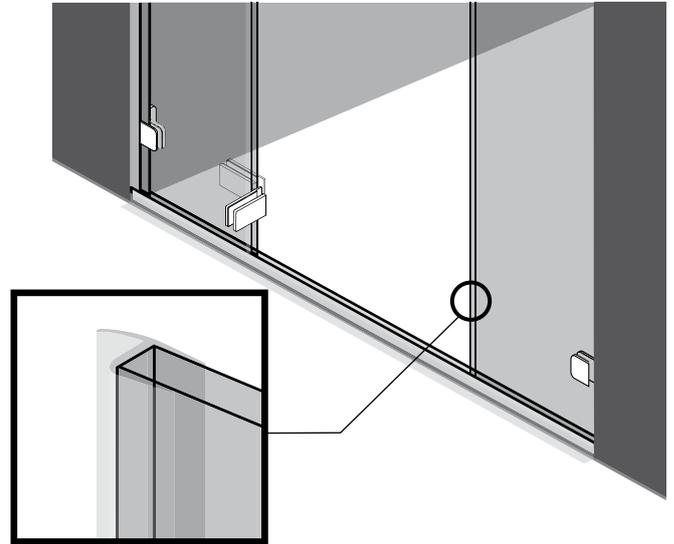


18

To protect the glass in-line panel from being damaged you can slide one of the vertical 1936 seals (1) onto its exposed vertical edge; cut the seal to size.

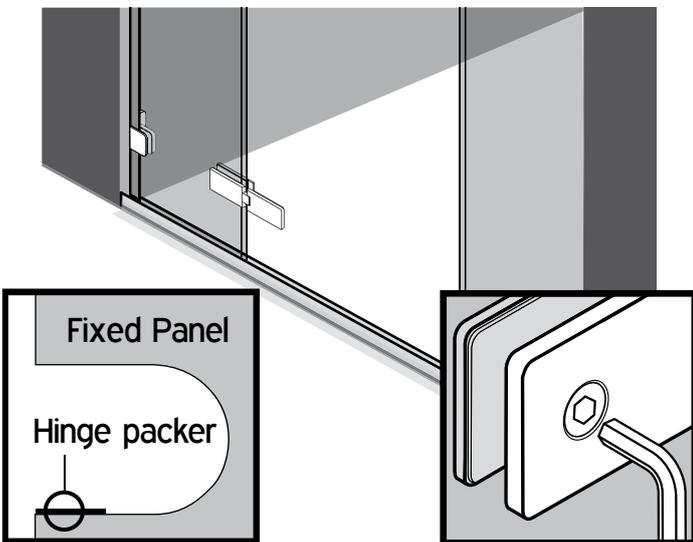

19

Insert a black rubber hinge packer into the in-line panel hinge slot, as shown. Disassemble the hinges, being careful not to damage the polished surfaces. Place the hinges and faceplates either side of the hinge slots in the glass in-line panel, with gaskets inserted and Allen bolts facing inwards; loosely screw the hinges and faceplates together.


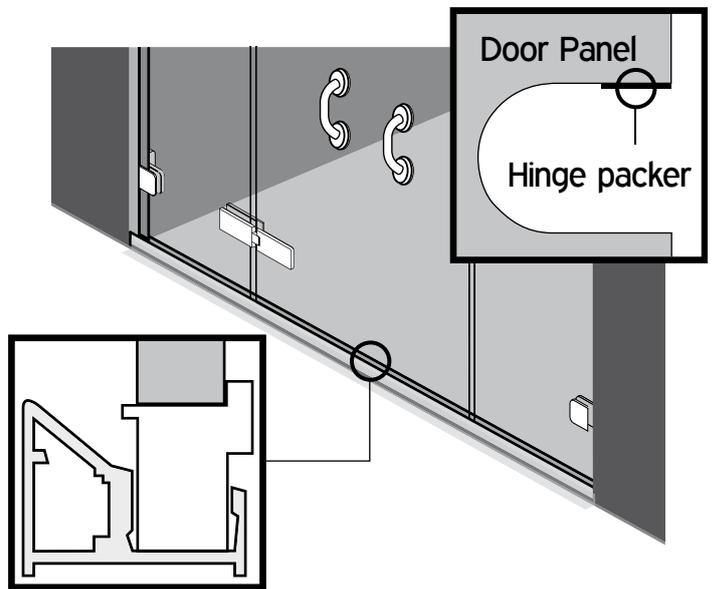


20

Steps 20-21 require one person to support the glass door panel at all times, while another person must be inside the enclosure with faceplates, gaskets and screws. Insert a black rubber hinge packer in the door hinge slots as shown. Unclick the underframe seal and position the door mounting blocks in the underframe channel.

Using the suction glass lifters, lift the glass door panel onto the mounting blocks; be careful not to chip the edges of the glass against each other.

View from inside the shower enclosure

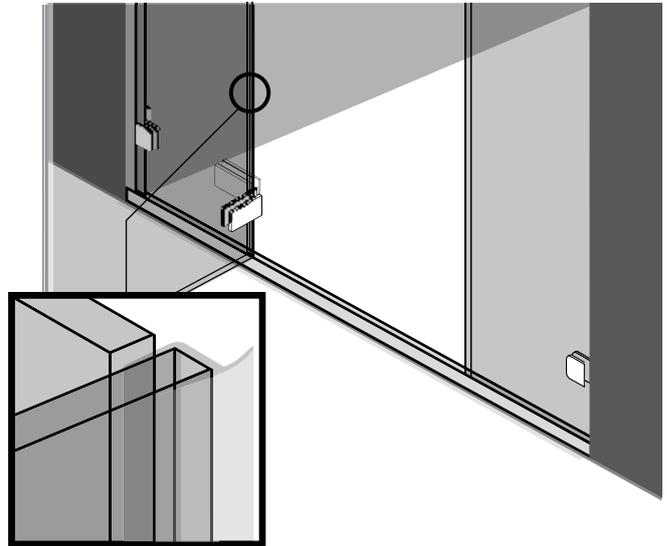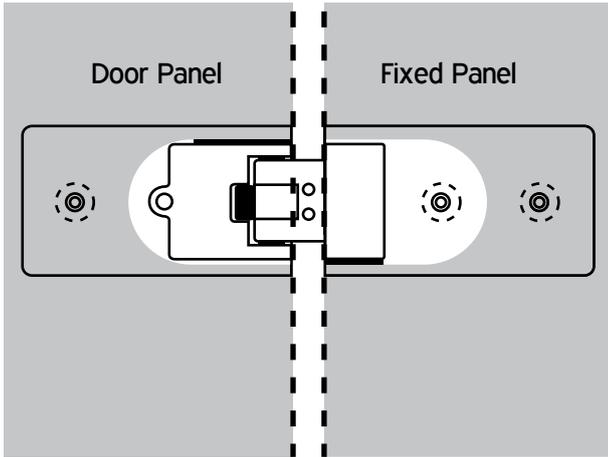

21




Position the hinges centrally in their slots and use a setsquare to ensure they are square to the edge of the glass. With gaskets inserted, loosely screw the hinges and faceplates together through the glass door panel slots.

Adjust the door so it is level with the two glass panels; the gaskets should be neat and flush, and the end of the glass door should not protrude beyond the hinges. Tighten the Allen bolts.

22


The other 1936 door-to-glass seal (2) should be cut into three pieces to fit vertically above, between and below the hinges on the end of the door.

Open the door outwards and slide the sections into place on the door. If necessary, adjust the door on its hinges so that it closes correctly onto the in-line panel seal.

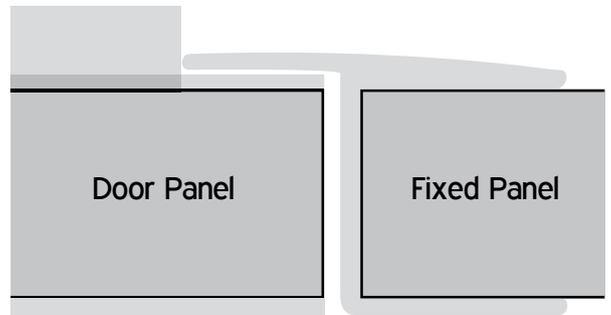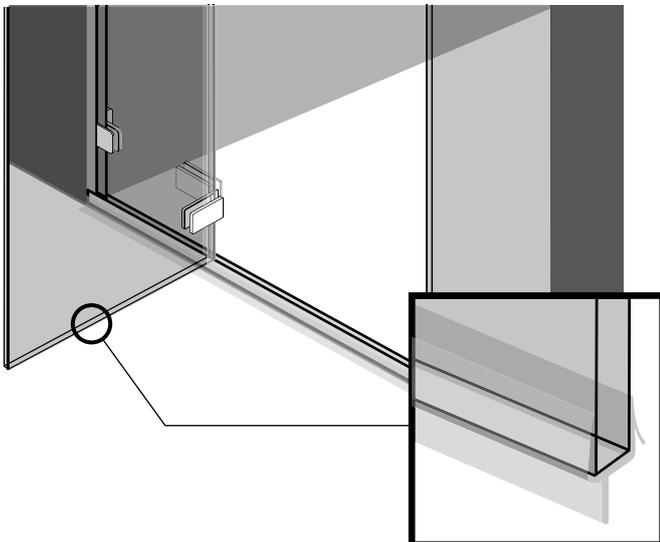


23

Mark the width of the glass door panel on the 1916 under-door seal (3); cut the seal to length, and slide it onto the bottom of the door.




24


Trim the 45° internal blade off so it misses the vertical 1936 seal.

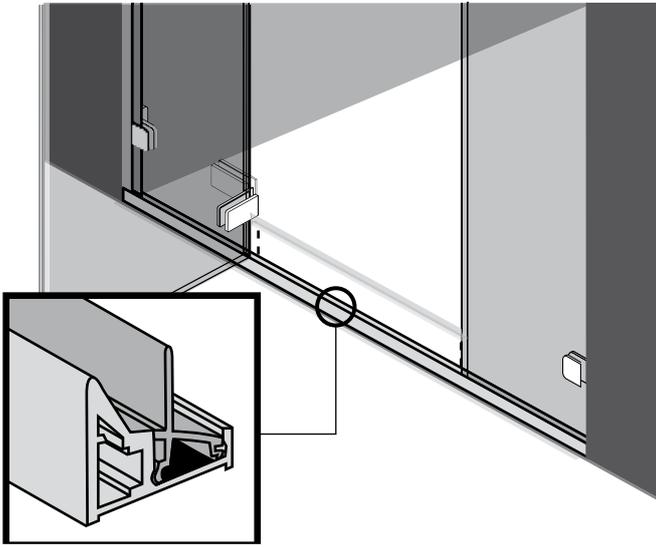

25 Remove the door mounting blocks and insert the plastic underframe.

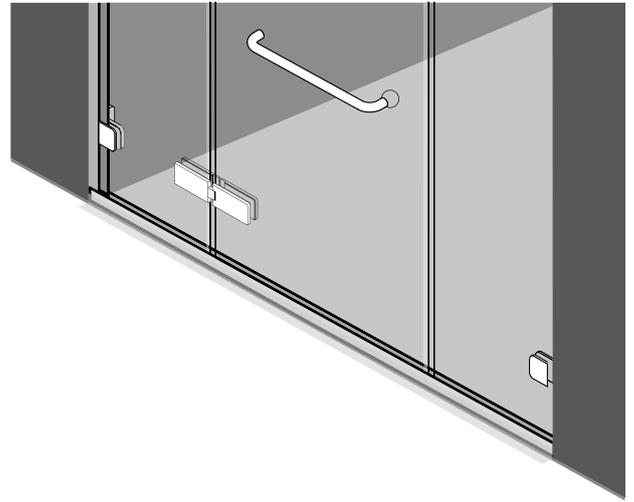

26 Disassemble the handle, being careful not to damage the chrome surfaces; fit the handle to the door.

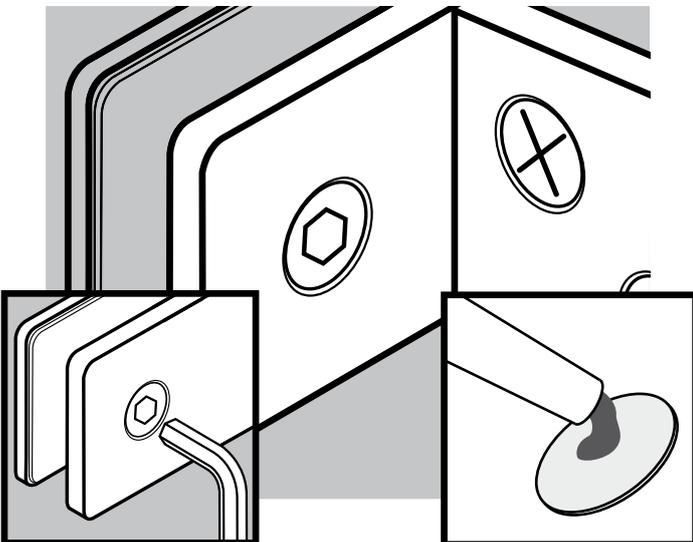

28 Make sure all screws and fittings are tight (especially the 4mm Allen bolts on the hinges). Tighten to 12 N.m. Dab the cover caps with silicone and place the caps on the glass-to-wall brackets. Caps are not provided for the polished hex Allen bolts on the hinges.

